

数量一覧表


[illegible]

数 量 一 覧 表

名 称	形 状・寸 法 等	単 位	数 量		備 考
			実 施	変 更	
【仮設道路工】					
泥土掘削	バックホウ0.28m3	m3	44.0		
固化材散布		m3	3.1		9.2/2.97
固化材混合		m3	44.0		
固化材	セメント系	t	9.2		44.0×200/1000×1.04
積込(ルーズ)	泥土	m3	44.0		
機械小運搬	泥土	m3	44.0		
掘削	バックホウ0.28m3	m3	4.0		
盛土		m3	60.0		
購入土砂	ほぐし	m3	75.2		62.7×1.2
積込	バックホウ0.45m3	m3	62.7		60.0/0.9-4.0
ダンプトラック運搬	2t積込	m3	62.7		
荒仕上げ		m2	52.0		
砂利舗装工	RC-40 t=0.10	m2	60.0		
掘削	仮設処分	m3	66.0		60.0+60.0×0.1
機械小運搬	土砂	m3	66.0		
整地		m3	110.0		44.0+66.0
地盤改良工	t=1.0	m2	150.0		
【水路横断工】					
敷鉄板設置・撤去	t=0.022	m2	18.0		3.0×6.0
敷鉄板賃料	22×1524×3048 802kg/枚 供用日数96日	枚	4.0		
高密度ポリエチレン管設置・撤去	φ600(ダブル管,無孔管)	m	8.0		
高密度ポリエチレン管継手	φ600	個	1.0		
土のう製作・設置撤去		m3	3.0		
【運搬費】					
仮設材運搬費		t	3.2		
仮設材積込み運搬費		t	3.2		

甲住池

土 量 配 分 表

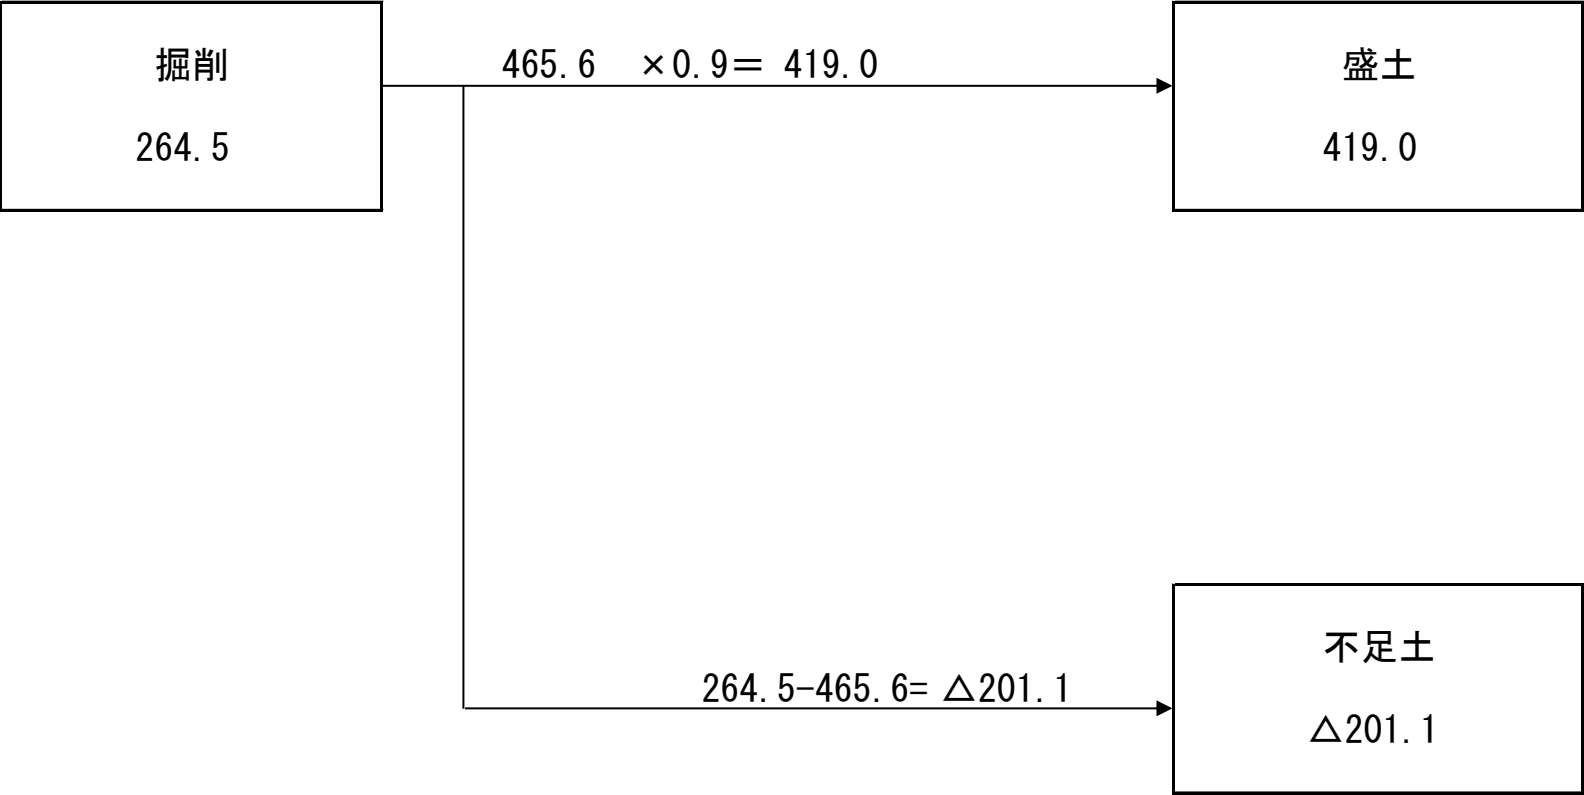

各種数量計算書													
甲住池		表土剥取			泥土掘削			掘削			盛土		
測点名	距離	断面	平均	数量	断面	平均	数量	断面	平均	数量	断面	平均	数量
NO. 0	-	1. 4			2. 3			3. 4			6. 1		
+6. 0	6. 0	1. 3	1. 35	8. 1	3. 9	3. 10	18. 6	6. 1	4. 75	28. 5	6. 5	6. 30	37. 8
+20. 0	14. 0	1. 2	1. 25	17. 5	7. 4	5. 65	79. 1	4. 5	5. 30	74. 2	10. 1	8. 30	116. 2
+36. 0	16. 0	1. 7	1. 45	23. 2	3. 0	5. 20	83. 2	6. 1	5. 30	84. 8	9. 2	9. 65	154. 4
+50. 0	14. 0	1. 3	1. 50	21. 0	2. 4	2. 70	37. 8	4. 9	5. 50	77. 0	6. 6	7. 90	110. 6
合 計	50. 0			69. 8			218. 7			264. 5			419. 0

各種数量計算書													
測点名 距離		L1: 法面整形			芝付工			L2: 法面整形			芝付工		
		法長	平均	数量	法長	平均	数量	法長	平均	数量	法長	平均	数量
NO.0	-	6.5			1.0			0.6			0.6		
+6.0	6.0	7.9	7.20	43.2	1.0	1.00	6.0	0.2	0.40	2.4	0.2	0.40	2.4
+20.0	14.0	9.4	8.65	121.1	1.0	1.00	14.0	0.7	0.45	6.3	0.7	0.45	6.3
+36.0	16.0	9.4	9.40	150.4	1.0	1.00	16.0	1.9	1.30	20.8	1.9	1.30	20.8
+50.0	14.0	7.8	8.60	120.4	1.0	1.00	14.0	0.5	1.20	16.8	0.5	1.20	16.8
合計	50.0			435.1			50.0			46.3			46.3

甲住池 各種数量計算書													
測 点 名	距 離	泥 土 掘 削			掘 削			盛 土			荒 仕 上 げ		
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	幅 員	平 均	数 量
		2.2			0.2			3.0			2.6		
仮設道路工	20.0	2.2	2.20	44.0	0.2	0.20	4.0	3.0	3.00	60.0	2.6	2.60	52.0
合 計	20.0			44.0			4.0	合 計		60.0			52.0

甲住池		各 種 数 量 計 算 書											
測 点 名	距 離	砂 利 舗 装 工			地 盤 改 良								
		幅 員	平 均	数 量	幅 員	平 均	数 量						
		3.0											
仮設道路工	20.0	3.0	3.00	60.0									
					3.0								
地盤改良	50.0				3.0	3.00	150.0						

甲住池 各種数量計算書													
測 点 名	距 離	架設パイプφ600			土のう			敷鉄板					
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量			
水路横断工		1.0											
	8.0	1.0	1.00	8.0									
					0.50			3.00					
	6.0				0.50	0.5	3.0	3.00	3.0	18.0			
合 計	14.0			8.0			3.0			18.0			