


工事数量総括表

市道西酒屋仁賀線 道路修繕工事

費 目	工 種	種 別	細 別	単位	数 量		摘 要
						計上数量	
本工事費							
	土工	床掘	小規模	m3	4.75	5	
		埋戻し	小規模	m3	2.2	2	
	舗装工	舗装版切断		m	6	6	
		舗装版取壊し		m2	1.8	2	
		殻運搬		m3	0.08	0.1	
		AS殻処分	中国アステック	t	0.188	0.2	
		上層路盤工	t=100mm M-30	m2	0.8	1	
		表層工	t=40mm 再生密粒度As13	m2	0.8	1	
	法面整形工						
		処理土購入	三好建材採石場	m3	29	29	
		盛土		m3	22.5	23	
		法面整形		m2	75	75	
		土砂等運搬	三好建材採石場 土のう使用分	m3	29	29	
		植生土のう	購入土	m2	25.0	25	
	縦排水工						
		側溝据え付け工	PU1-B300-H300	m	6.5	7	
		PU1-B300-H300		m	6.5	7	
		コンクリート	18-8-40高炉	m3	0.6	1	
		型枠	無筋構造物	m2	1.3	1	
		基面整正		m2	0.0	8	
	側溝工						
		側溝据付け工	FG300	m	4.0	4	
		FG側溝 横断用	300用	m	4.0	4	
		グレーチング					
		FG側溝 横断用	300用	枚	4.0	4	
		蓋版据付	40kg以上	枚	4.0	4	
	安全工						
		交通誘導警備員B		人	18.0	18	

土工集計表

市道西酒屋仁賀線 道路修繕工事

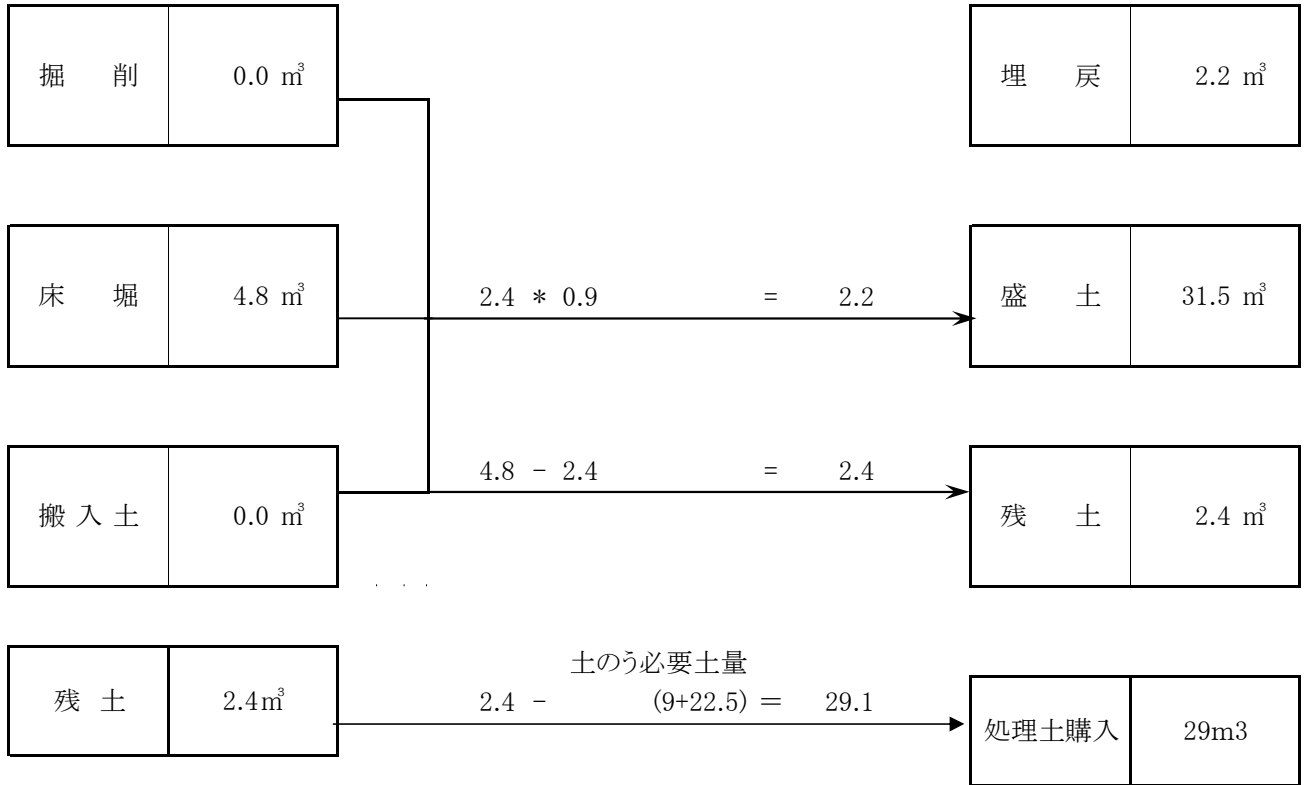

[illegible]

[illegible]

構造物撤去工 数量計算書

種 別 番 号	距 離	舗装版取壊し			コンクリート構造物取壊し			舗装版切断			摘 要
		幅	平 均	数 量	法長	平 均	数 量	切長	平 均	数 量	
横断溝部	3.0	0.6	0.60	1.8				6.0	6.00	6.0	
合 計	36.0	(m)		1.80	(m2)		0.00	(m3)		6.0	(m)

